

# GUARDRAIL 2000™


US Patents 5,647,451 D404,151 Patent Pending

**A**  
**one time**  
**life saving**  
**investment**



## Parapet Attachment

- Attaches to standard upright
- Adjustable to varied parapet wall thicknesses
- Complies with OSHA 1926 M
- 10" Adjustment range
- Mounts to wall quickly & easily
- Uses standard 2x4s as rails
- Custom made to your specific needs

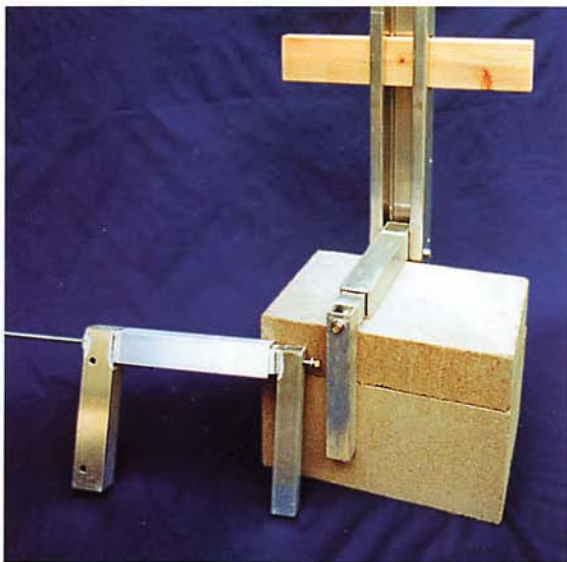

Guardrail 2000 installed over Ice & Water Shield on a 12/12 pitch

## Approved Fasteners

### In Wooden Framing Member

Type	Number	Location
16d sinke	4	1 in each hole
16d double head	4	1 in each hole
Simpson SDS 1/4X2 1/2	3	1 at pivot, 1 in each hole 2 & 4
# 8 screws*	3	1 at pivot, 1 in each hole 2 & 4
GRK 5/16x2 _	3	1 at pivot, 1 in each hole 2 & 4

\*screws are to be of harden type, not drywall or deckingscrews

### In Concrete

Type	Number	Location
1/4"X 1 1/2" Tapcon	3	1 at pivot 1 in each hole 2 & 4

Call for approval of your specific fastener.

## Adjustable Guardrail System

- Gives you freedom of movement on roofs & increases production
- No need for harnesses & lanyards
- Spaced 8'-0" on center
- Uses 16d nails to secure to roof
- Eyelets in base for easy installation & removal
- Adjust to 90 degrees, pitches of 4/12, 8/12, and 12/12
- Lightweight - made of aluminum
- Nearly indestructible, reusable
- Complies with OSHA's 1926 M
- Folds to 2" x 4" x 44" for moving and easy storage



## Guardrail System For Roofing



- Installs over existing shingles
- Can protect during tear offs
- Installs easily off ladders
- Allows for freedom of movement on roofs & increases production
- Spaced 8'-0" on center
- Uses standard 2x4s for railings
- Uses 16d nails to secure to roof
- Eyelets in base for easy installation & removal
- Complies with OSHA's 1926 M
- Can comply with OSHA's protection from falling objects regulation
- Adjust from 90 degrees, pitches of 4/12, 8/12, and 12/12
- Lightweight - made of aluminum each bracket weighs 10.4 pounds
- Nearly indestructible, reusable
- Folds to 2" x 4" x 44" for moving and easy storage

## Expand Your Guardrail System

- Attaches to standard upright
- Attaches to standard scaffold frames
- Conforms with OSHA 29 CFR part 1926 scaffold standards
- Uses standard 2x 4s as rails
- Has toe board capability
- Expands the use of Guardrail 2000 Bracket

